

二併/三併電磁閥 KLSV 系列

Dual & Triple Solenoid Valve KLSV Series



產品特色 Features

二口二位直動式電磁閥。組合式設計，多進一出功能，每個進氣口皆安裝逆止閥，可實現不同氣體切換的功能。

2/2 direct-acting solenoid valve. Selections of dual inlets or triple inlets with one outlet port. Used for switching outputs between multiple inlet fluids. Non-return valves are installed in every inlet ports.

閥體材質 Body material 鋁合金 Aluminum

口徑 Port G1/2"

流通孔徑 10mm

電壓 Voltage DC 24


密封件 Seal material 氟橡膠 Viton

工作壓力 Working Pressure 0~35 Bar

工作介質 Media 惰性氣體或氧氣 Inert gas or Oxygen

外觀尺寸 Overall Dimension

KLSV-2/1-10-24-AL 二進一出 Two inlets one outlet ports

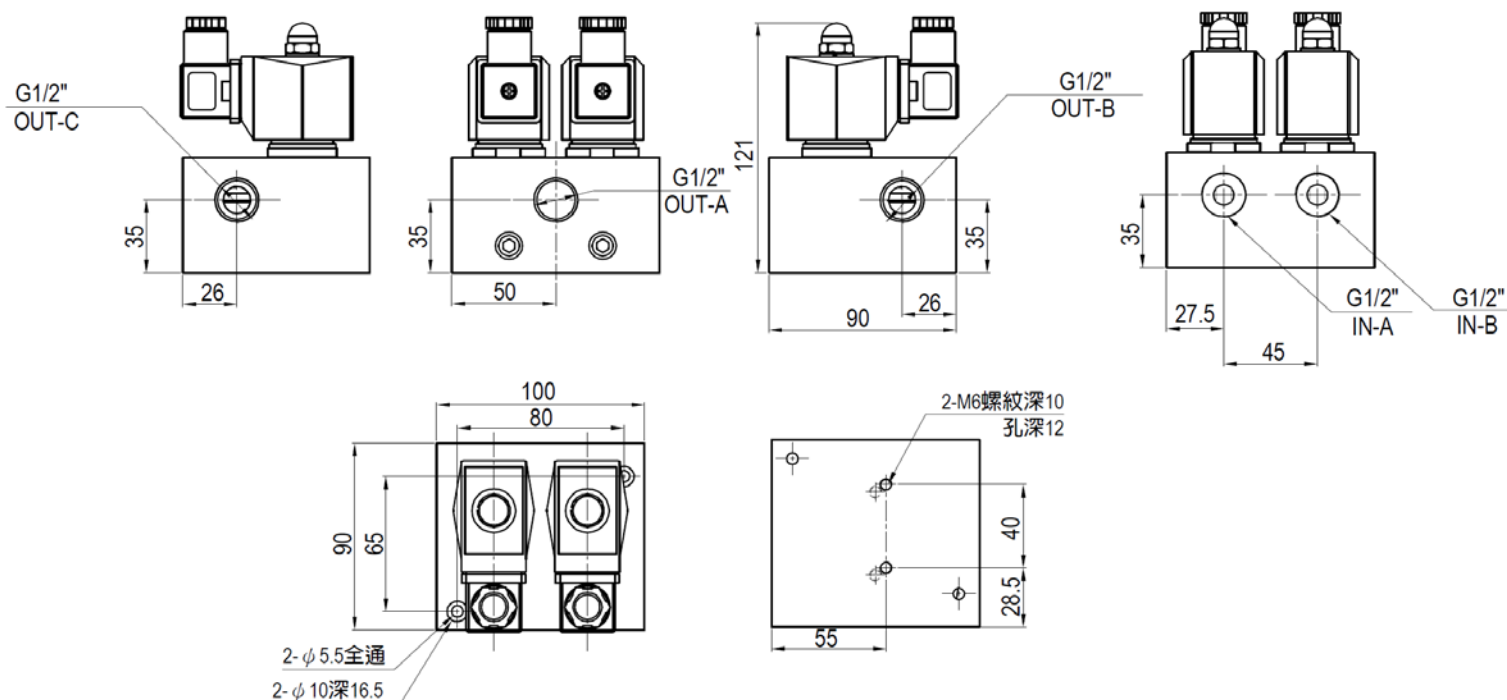

Kao Lu Enterprises Co., Ltd. TEL:886-4-24874219 · 24860626
Genn Dih Enterprises Co., Ltd. FAX:886-4-24864269 · 24862824
Web:www.genndih.com E-mail:genndih@ms43.hinet.net
No. 17, Lane 822, Sec. 2, Zhongxing Rd., Dail Dist., Taichung City 41244, Taiwan(R.O.C)


二併/三併電磁閥 KLSV 系列

Dual & Triple Solenoid Valve KLSV Series



外觀尺寸 Overall Dimension

KLSV-3/1-10-24-AL 三進一出 Three inlets one outlet ports

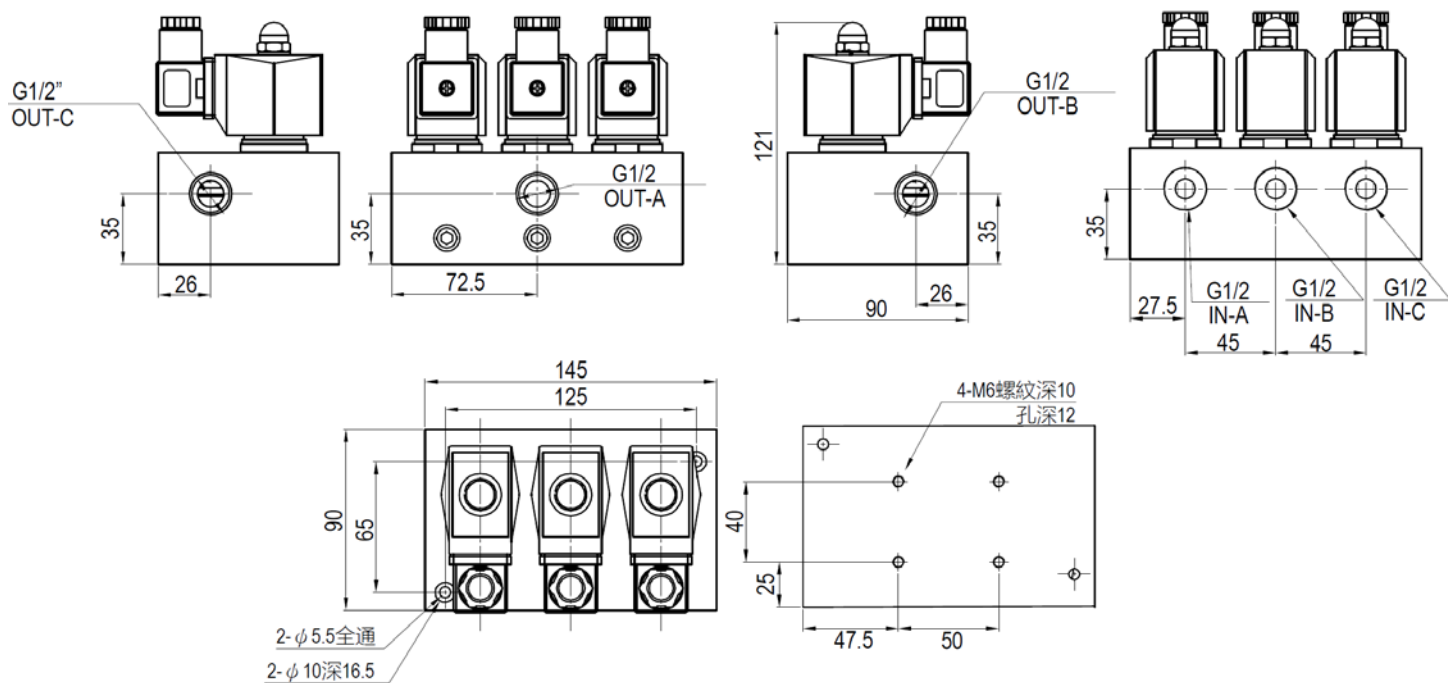

Kao Lu Enterprises Co., Ltd. TEL:886-4-24874219 · 24860626
Genn Dih Enterprises Co., Ltd. FAX:886-4-24864269 · 24862824
Web:www.genndih.com E-mail:genndih@ms43.hinet.net
No. 17, Lane 822, Sec. 2, Zhongxing Rd., Dail Dist., Taichung City 41244, Taiwan(R.O.C)